











DC Contactor

CZWB100A DC Contactor



USES

This product have one normally close contact, for electric vehicles, telecommunication equipment, engineering machinery, car batteries, electric forklift trucks, trains, ships, electronic control systems such as uninterruptible power supply.

CZWB	<u>100A</u>	<u>-s</u>	<u>-C</u>	<u>-K</u>	<u>-M</u>	<u>-</u>	/24V
1	2	3	4	5	6	7	8

- 1 Product type
- 2 Rated current
- 3 Auxiliary switch: None Without auxiliary switch; S With auxiliary switch
- 4 Magnetic blowouts
- Megnetic holding structure: K Two joint magnetic retention(Single coil, Two joint self-locking); 2K Three joint magnetic retention(Double coil, Three joint self-locking)
- 6 Mounting bracket type: M Horizontal (default), 1L One vertical, 2L Two vertical, X Oblique, 2N Rear
- 7 Other function codes: I: With suppressor diode, R: With pre-charged resistance ,CO: Continuous , IN:
- 8 Coil rated voltage: 6V,12V,24V,36V,48V,60V,72V,84V,120V,150V,220V etc.

USE OF THE ENVIRONMENT

ORDER INS	STRUCTION
-----------	-----------

	Contact lead M8 tightening	≯9.0 appropriate	U.N.W.	436g		
Coil lead-out torque (N.m) ≯0.8 a		≯0.8 appropriate	U.N.W.(-C-S-M)	460g		
	Ambient temperature -25~+70°C					
	Relative humidity	+20℃ 98%				
	Vibration freq. atthe fixed	3G, 1 \sim 50Hz amplitude 0.5mm	mm			
	Concussion	(60 \sim 100) time/minute \sim				
	Altitude	2000m				
	Installation direction	Random	Mounting bracket type	M Horizontal (default), 1L One		
	International protection IP40 (According IEC60947)			vertical, 2L Two vertical, X Oblique, 2N Rear		

ORDER FORM DESCRIPTION

When ordering, please state the following: name, full model, control coil voltage specification, installation frame type, whether with auxiliary contact, order quantity. For example: DC Contactor CZWB100A/24V 100pcs, indicating the load rated current 100A, without auxiliary contact, default mounting bracket, coil control voltage 24V purchase 100pcs. Special voltage specification products, such as user needs can be special order.













TECHNICAL PARAMETERS

(Version 1.47)

CZWB100A		
1 NC		
6V,12V,24V,36V,48V,60V,72V,84V,120V,150V,220V etc.		
≤80V		
100A		
≤80mV		
≤70%		
≤35%, ≥5%		
0.8-1.2Us		
35ms		
10ms		
10ms		
3ms		
20ΜΩ		
50Hz/60Hz 1000VAC 1minute		
800A/5ms at 48V DC		
14-23		
≤80		
≤65		
20,000 times		
300,000 times		
Continuous or Intermittent(default)		

LOAD CHARACTERISTIC CURVE

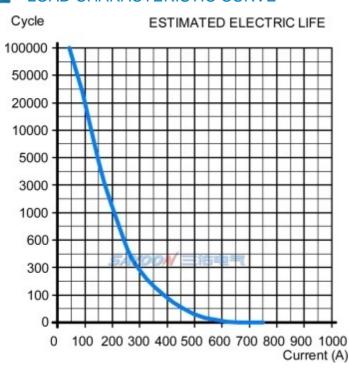

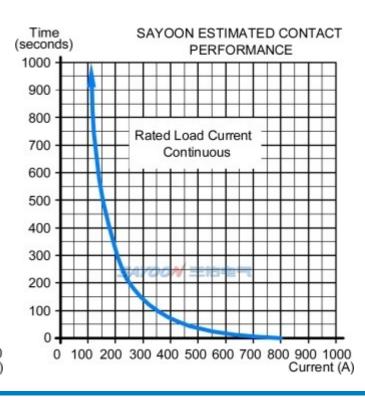














OTHER TECHNICAL PARAMETERS

Contact material	Ag alloy	
Load terminal type	M8 Screw	
Coil terminal type	6.3mm spade terminals	
Auxiliary contact rated load (optional)	2A/48VDC, 5A/24VDC	
Testing organization certification	CE,FCC	

Note: As regarding to the different using environments of customers which requires different focus of the functions, and in order to improve the comprehensive properties of our products, sayoon may adjust the coil parameters, temperature rise and so on. The above parameters are for reference only, For details, please refer to the guidelines for selection and use of the SAYOON DC contactor.

INSTALLATION DIAGRAM

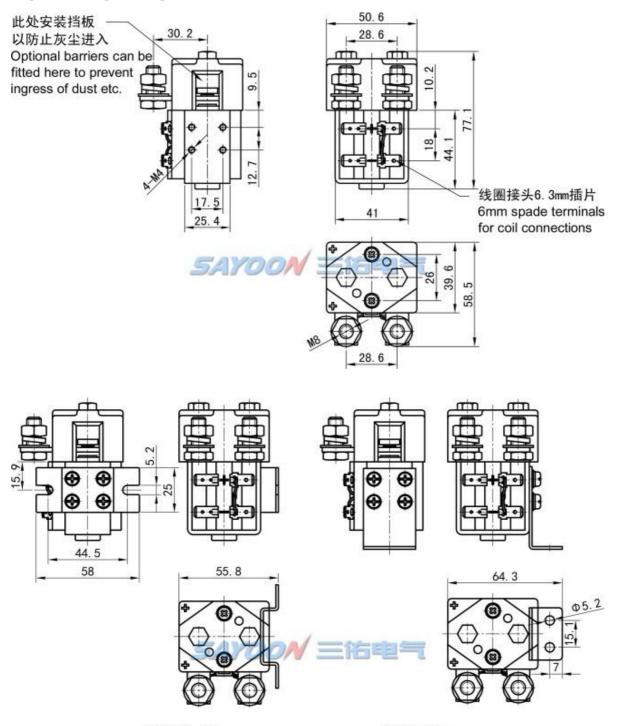

安装架形式M Mount in the form M

安装架形式1L Mount in the form 1L














TEMPERATURE RISE CURVE

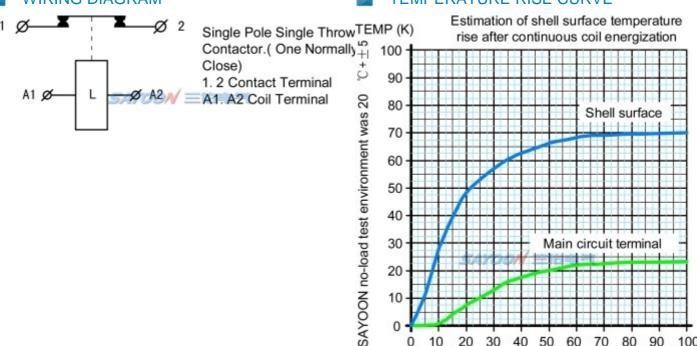

FEATURES

Suitable for electric forklift, battery cars, tractors, excavators, brick machine, cleaning vehicles, automotive air-conditioning, communication power supply, uninterruptible power supply, power supply switches such as electroplating electronic control system control circuit, has the advantages of small volume, large load capacity, long service life, easy maintenance and other characteristics, welcomed by users. The products in accordance with the standard of the JB2286-78, JB3974-85, YD / 585-92, YD / T512-92 requirements; the plant and related test unit test, meet the standard requirements, the user use for many years, the maximum to meet user needs, quality and reliable.

10

20

30 40 50 60

70

80 90

Time (minute)

100

3D NUMERICAL AND MODELING INTERACTIVE DISPLAY

CZWB100A-L: http://www.sayoon.com/en/v3d/p.html?type=czwb100a-l CZWB100A-M: http://www.sayoon.com/en/v3d/p.html?type=czwb100a-m